



CLAD-MAX

Exterior Compact Laminate

12 Year Warranty

WOODGRAIN

Follow your heart and side with the elegance of these timeless creations crafted to make your exterior beautiful.




CMP-5002-SF

MAJESTIC
IMPRESSIONS





Choose from a collection of wood grain surfaces to give that much needed rustic touch to your beloved spaces.

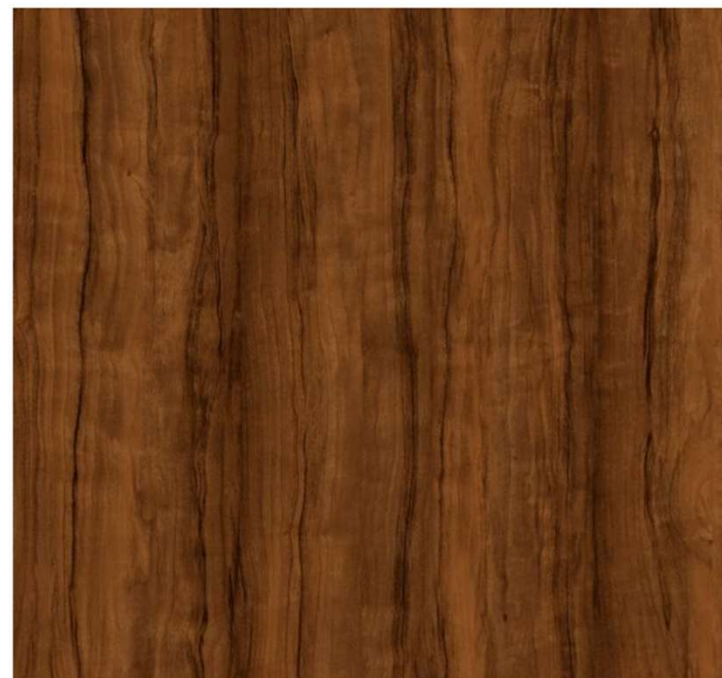

CMP-5001-SF



E X T E R I O R C L A D D I N G

NATURAL WOODS

EXTERIOR CLADDING



NATURAL WOODS

EXTERIOR CLADDING



SDC - 30307
RAYA OAK LIGHT



SDC - 30306
RAYA OAK DARK




 SDC-30312
CALIFORNIA ELM

E
X
T
E
R
I
O
R
C
L
A
D
D
I
N
G

NATURAL WOODS


EXTERIOR CLADDING

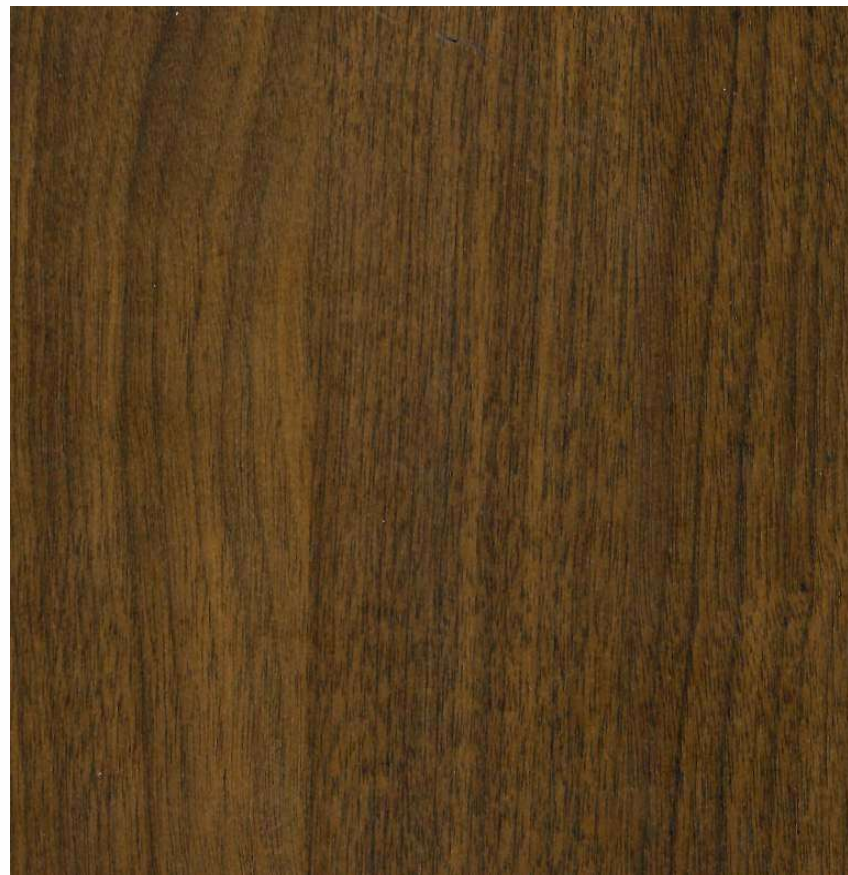

 SDC-30310
SUNSHINE



CMP-5406
RIGOLETTO

E
X
T
E
R
I
O
R

C
L
A
D
D
I
N
G

EXCLUSIVE STONES


EXTERIOR CLADDING



CMP-5404
OCEANSIDE



CMP-5454-SF

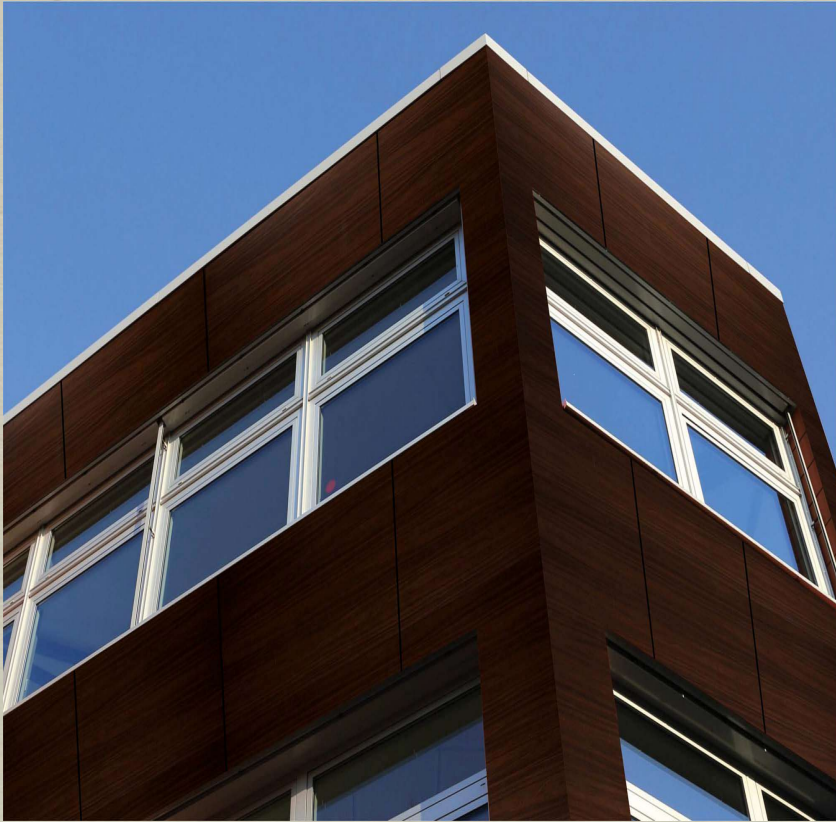

CMP-5310

CLAD-MAX Exterior Compact



CMP-5484-SF

CLAD-MAX Exterior Compact





CMP-6024-SF



CMP-5222-SF




CMP-5222-SF



EXTERIOR CLADDING

SOLIDS

EXTERIOR CLADDING



SDC - 10155
OCEANSIDE



SDC - 10111
BEIGE




SDC - 10116
SILVER GREY



SDC - 10132
COFFEE BROWN



- 10136
CHARCOAL

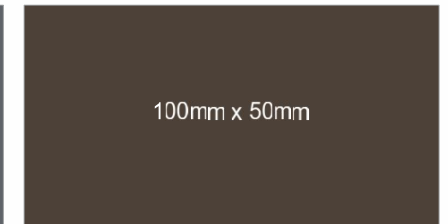

SDC - 10112
CHOCOLATE

Lab Test Report



Enkay Test House

Approved by Government of New Delhi, India (ISO 9001:2015, ISO 14001:2015 & ISO 18001:2007 Certify Company)

R-369, BLK-R, Near Mangolpuri Industrial Area Phase-I, New Delhi-110083

E-mail ID - info.ethlab@gmail.com, infoetools@gmail.com

Tel:- +91-11-33074541, Mobile No:- +91-8920670306, 8527524513

TESTING OF DRUG/ALCOHOLIC DRINK/ COSMETICS/CHEMICALS/MINERALS/WATER & FOOD / BUILDING MATERIAL / CALIBRATION
Non-Destructive Testing (NDT) & Instruments Supply Services



TEST REPORT

Sample Name: HPL (High Pressure Laminate) (Size-500 X 500 mm)	Ref. No: Nil	Page-01 of 01
Customer Name: M/s. Future Good Flooring	Sample Quantity: 1 Nos	
Customer Address: Khasra No: 323 Eld-Gah Ram Colony Road, Near Chattarpur Mandir, Chattarpur New Delhi-110074	Sample Condition: NA	
Sample Received On: 18/02/2020	Report No.: 20200218Gen005	
Job Code.: GTH/BM/20200218Gen005	Reporting Date: 06/03/2020	
Description: - Brand Name Cladmax Panel	Duration of Testing: 18/02/2020 to 06/03/2020	

Sr. No.	Test Parameters	Specifications As per MTS	Testing Results	Test Method
Physical Test				
1.	Thickness of HPL Sheet, mm	6 ± 0.2 mm	6	By Measurement
2.	Skin Thickness, mm	0.25 mm Min	0.26	By Measurement
3.	Polyethylene type LDPE (g/cm ²)	0.92 min	0.95	ASTM D4635 - 16
4.	Tensile Strength, N/mm ²	4.2 Min	5.1	ASTM E8
5.	Yield Strength, N/mm ²	4.0 Min	4.7	ASTM E8
6.	Elongation, %	12.0 Min	13.2	ASTM E8
7.	Flexural Elasticity, kg/mm ²	4030 Min	4125	ASTM C 393
8.	Hardness (Pencil hardness)	3H	Passes the test	ASTM E8
9.	Thermal Expansion at 50°C	1.1 mm min	1.7	ASTM D 698
Thermal Properties				
1.	Thermal Expansion, mm/M/50°C	1.1 Min	1.3	ASTM D-698
2.	UV Stability @ 60±3°C	Brilliant	Brilliant	ASTM D4329 - 13
3.	Temperature resistance, °C	-50 to +80	Passes the test	By Measurement
4.	Heat transition co-efficient, W/m2K	5.3 Min	5.86	ASTM C-1363
Acoustic Properties				
1.	Sound Transmission, dB	25 dB Max	22	ISO-140/III
2.	Sound Absorption Factor as (NRC)	0.08 Min	0.05	IS:8225-1987
Weather Ability Properties				
1.	Color retention, Hrs	82600 Hrs	Passes the test	ASTM D 2244-89
2.	Gloss Retention, Hrs	82600 Hrs	Passes the test	ASTM D523-89
3.	Chalking	No Chalking was Seen	Passes the test	ASTM D 4214-89
4.	Salt Spray @ 35±2°C	No Change 3000 Hrs	Passes the test	ASTM B117 - 11
5.	Humidity, 100%RH	No Blister & No Cracking	Passes the test	ASTM D 2247-87

Remarks: The Sample confirms (meeting) to the requirements of material test Specification (MTS) for HPL (High Pressure Laminate) with respect to above test.

*** End of Report***

For Enkay Test House
Verified By

Authorized Signatory

AN ISO 9001:2015, ISO 14001:2015, ISO 18001:2007, ESM, QMS, OHSAS & GOVT. APPROVED LABORATORY

(1) The results listed refer only to tested samples and applicable parameters. Endorsement of product is neither inferred nor implied.
(2) Total liability of our lab is limited to the invoiced amount. (3) Samples will be destroyed after 30 days from the date of test certificate for mechanical & 30 days from the date of test certificate for chemical unless otherwise specified. (4) This report is not to be reproduced wholly or in part and cannot be used as an evidence in the court of Law and should not be used in any advertising media without our special permission in writing. (5) Report refer to the sample submitted to us and not drawn by Enkay Test House unless mentioned otherwise.

www.enkaytesthouse.com